


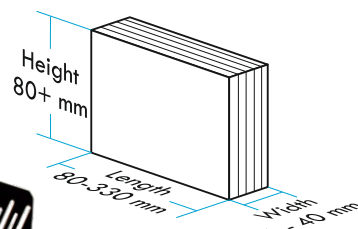








 Book size



 Cover size

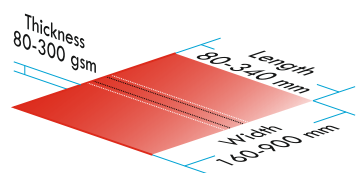

Standard features:

- x 2 in 1 tank for spine and sidegluing
- x Sidegluing applied by ribbed disks
- x Adjustable glue cut-off from the touch screen
- x Fix milling depth (0.5 mm) and notching
- x Tiltable milling unit
- x Paper dust extractor
- x Adjustable book positioning from the touch screen (max. 10 mm)
- x Cover sensor
- x Large cover holder, with skew adjustment
- x Automatic carriage start
- x 1~230V

Available options for this model:

- x Magnetic bookblock support
- x Glue fume extractor
- x Sideshelf
- x Tape binding
- x Direct hardcover binding, with adjustable nipping height

Specifications	LAMIBIND 2000 EVA
Dimensions of the machine (l x w x h mm)	1400x825x1057
Package of the machine (l x w x h mm)	1600x1025x1300
Net weight (kg)	300
Gross weight (kg)	340
Power supply (elective)	1~230 V-50 Hz / 200-220 V-60 Hz / 100-120 V 60Hz
Nominal current (A)	12 / 14 /25
Capacity (kW)	3
Compressed air supply (bar)	Not necessary
Length of the bound document (mm/inch)	80-340
Thickness of the bound document (mm/inch)	1-40
Theoretical number of working cycles (fwd-bwd/hour) * The above value is theoretical number of the working cycles. The real speed and quantity of books can be bound on the machine depends on the strength features of the glue used on the machine, the necessary binding/nipping time, the thickness of the document to be bound, depends on the skill and quickness of the machine operator, and the selected binding technology.	290*
Adjustment of the binding time of the document	1-99
Binding cycle counter	Yes
Automatic start of the carriage clamp	Yes
Milling unit	
Spine preparation	Fixed Milling & Notching
Possibility to switch off the milling unit	Yes
Gluing unit	
Heat-up time (minute)	20-25
Temperature range of the melting of the glue (C/F)	100-200
Volume of the glue container	2 kg
Possibility to use different type of spine and side glue & side gluing rollers	Yes
Adjustable length regulation of the glue application (Glue cut off)	Yes
Standby mode	Yes
Binding unit	
Possibility to adjust the position of the book block over the binding unit	Yes
Cover sensor	Yes
Other Functions	
Paper dust extraction	Yes
User Interface	Colour Touch Screen
Operating software	RIGO
Software update	Yes
Online remote control	Yes
Options	
Tape binding	Option
Magnetic book holder	Option
Glue fume extractor unit	Option
Large cover holder	Option
Side shelf	Option

Important: Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately. The images featured in this guide are for illustrative purposes only. The manufacturer is not liable for any printing mistake.

