


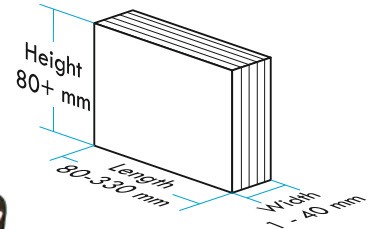










Book size



Cover size

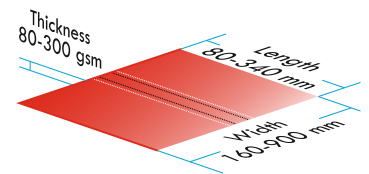

Standard features:

- x Unique closed PUR system (PUR spine and side gluing) (tank capacity: 500g)
- x Adjustable glue cut-off from the touch screen
- x Adjustable book positioning from the touch screen (max. 10 mm)
- x Fix milling depth (0.5 mm) and notching
- x Large cover holder, with skew adjustment
- x Paper dust extractor
- x Cover sensor
- x 1~230V

Available options for this model:

- x Magnetic bookblock support
- x Sideshelf
- x Tape binding
- x Tilttable milling unit
- x Automatic carriage start
- x Glue level indication
- x Automatic setup according to block thickness
- x Direct hardcover binding, with adjustable nipping height
- x Remote service support, Industry 4.0 ready

Important:

Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately.

Specifications	LAMIBIND 340 PUR
Dimensions of the machine (l x w x h mm)	1440x825x1235
Package of the machine (l x w x h mm)	1640x1025x1435
Net weight (kg)	300
Gross weight (kg)	340
Power supply (elective)	1~230 V-50 Hz / 200-220 V-60 Hz / 100-120 V 60Hz
Nominal current (A)	12 / 14 / 25
Capacity (kW)	2
Compressed air supply (bar)	6
Length of the bound document (mm/inch)	80-340
Thickness of the bound document (mm/inch)	1-40
Theoretical number of working cycles (fwd-bwd/hour) * The above value is theoretical number of the working cycles. The real speed and quantity of books can be bound on the machine depends on the strength features of the glue used on the machine, the necessary binding/nipping time, the thickness of the document to be bound, depends on the skill and quickness of the machine operator, and the selected binding technology.	290*
Adjustment of the binding time of the document	1-99
Binding cycle counter	Yes
Milling unit	
Spine preparation	Fixed Milling & Notching
Gluing unit	
Heat-up time (minute)	20-25
Temperature range of the melting of the glue (C/F)	100-200
Volume of the closed PUR glue container	Special cartridge system
Adjustable length regulation of the glue application (Glue cut off)	Yes
Adjustment of the height of the PUR nozzle	Yes
PUR heating zones	2
Standby mode	Yes
Binding unit	
Possibility to adjust the position of the book block over the binding unit	Yes
Cover sensor	Yes
Other Functions	
Paper dust extraction	Yes
User Interface	Touch Screen
Operating software	RIGO
Software update	Yes
Online remote control	Yes
Options	
Glue level indication for PUR	Option
Possibility to switch off the milling unit	Option
Tape binding	Option
Side shelf	Option
Magnetic book holder	Option
Large cover holder	Option

Important: Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately. The images featured in this guide are for illustrative purposes only. The manufacturer is not liable for any printing mistake.

